

4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, 31-2367, AND DATE CODE" C.FERRULE & CONTACT ARE SHIPPED LOOSE

5>. SHOWS CABLE ENTRY DIMENSIONS.


6. CUSTOMER NOTE: SOLDER CONTACT TO CABLE.
WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01)
AND DIE SET 227-1221-11, CAVITY 'B' (M22520/5-11 CLOSURE 'B')

7. CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-11, CAVITY 'A' (M22520/5-11, CLOSURE 'A').


12.55 APPROX ---

[.494]

RECOMMENDED CABLE STRIPPING DIMENSIONS



SCALE 2.000

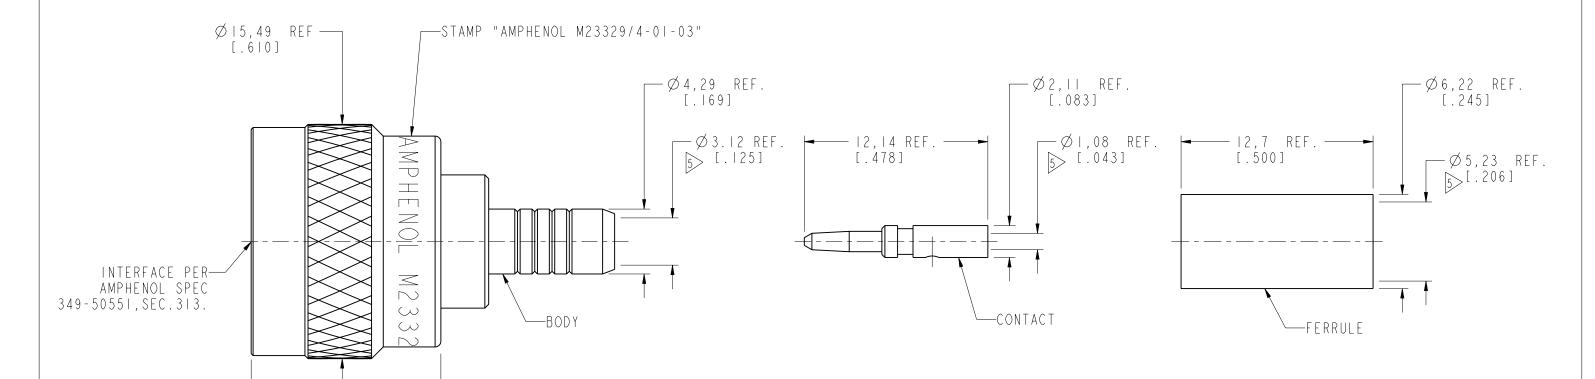

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.05mm ±0.1mm ±0.2mm ±0.3mm ±1°	MATERIAL	DRAWN R.MAO	DATE 13-Aug-12	TITLE TNC PLUG		Amphenol RF
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they		ENGINEER S.LI		MIL-CRIMP 23329	0.1.5.1.5	www.amphenolrf.com
are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	REFERENCE EAR # 961603 AND	APPROVED S.HSIEH		FOR RG58 & 141/U	ΛΓ 2 -	
rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to	CONFIGURATION LEVEL:	CAD FILE	13 7149 12	DWG SIZE	REV	EM NO. 31-2367
or disclosed by said drawings, specifications, or other data.	FINISH			В	V PAR	RT NO. 31-2367