

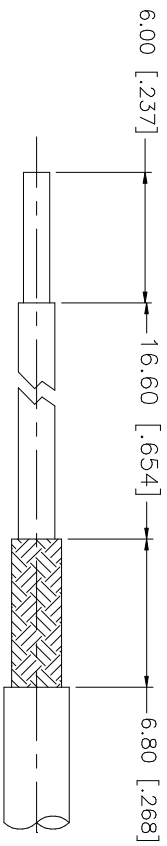


REV.	DATE	DESCRIPTION
NC	07/16/01	INITIAL RELEASE
A	01/18/06	UPDATE DRAWING FORMAT

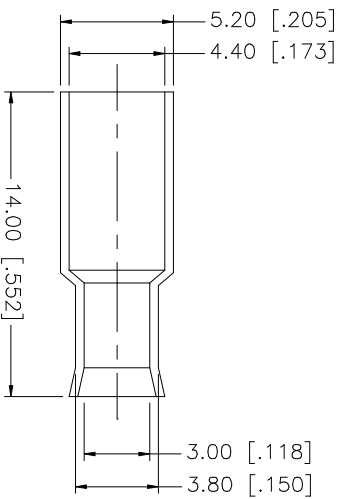

RECOMMENDED CABLE
STRIPPING DIM'S

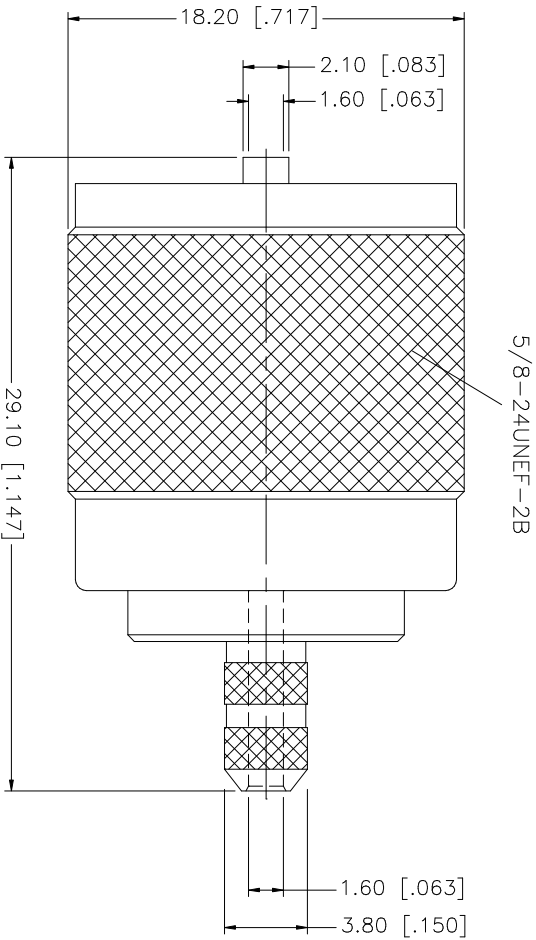

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:	APPROVALS	DATE	PART DESCRIPTION
8					0.5 - 8mm ± 0.20mm	DRWN	01/18/06	<p>Amphenol Connex</p> <p>UHF CRIMP PLUG (FOR RG-174/U, 187A/U, 316/U)</p>
7					8 - 30mm ± 0.40mm	G.R.S.		
6					30 - 120mm ± 0.50mm	CHECKED		
5	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	ISSUED		
3	CONTACT PIN	BER. COPPER	GOLD	1	.020 - .315 = ± 0.007"	SHEET	1 OF 1	
2	INSULATOR	TEFLON	NATURAL	1	.315 - 1.180 = ± 0.015"			
1	BODY	BRASS	NICKEL	1	1.180 - 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:\182\182330.DWG	
						REV. A	SIZE A	SCALE NA