

ATTENUATORS N M/F 4GHZ 50W

SA4N50W-XX

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-4 GHZ
 VSWR 1.20 MAX
 POWER (AVG) 50 WATTS @ 25 DEG C
 POWER (PEAK) 1000 WATTS
 IMPEDANCE: 50 OHMS
 ATTENUATION ACCURACY:
 3-20DB +/- .4DB
 30-40DB +/- .6DB
 BIDIRECTIONAL EXCEPT FOR 50 DB VALUES


MECHANICAL:

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 CONTACT: FEMALE: BeCu, MALE: PASS. STAINLESS STEEL
 INTERFACE: MIL-STD-348B
 INSULATOR: TEFLON
 TEMP: -55 C TO +125 C

ROHS COMPLIANT

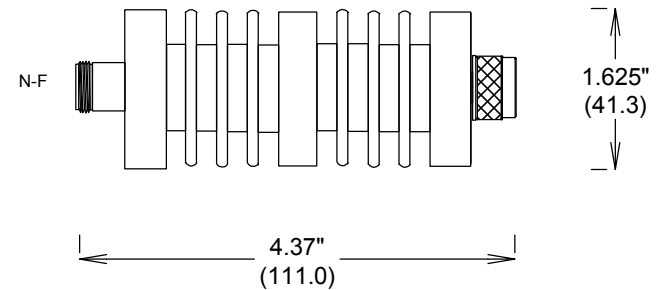

MEASUREMENTS BELOW ARE TYPICAL

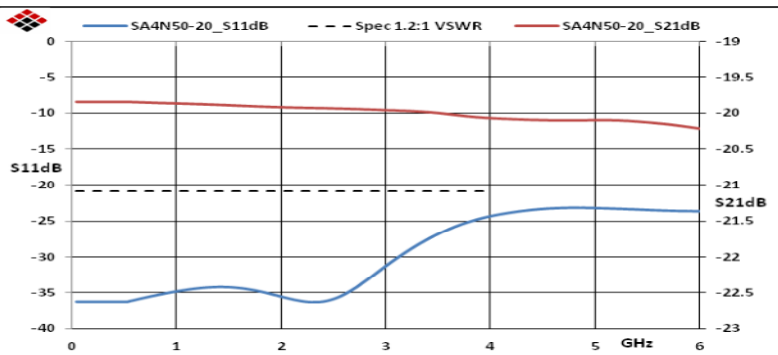

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ATTENUATORS N M/F 4GHZ 50W

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SA4N50W-XX	B
SCALE	SHEET		