
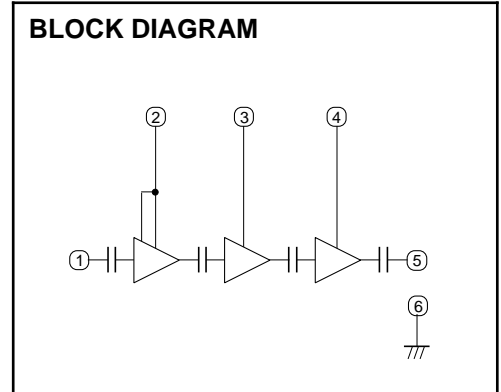


MITSUBISHI RF POWER MODULE
M68762H

440-490MHz, 12.5V, 30W, FM MOBILE RADIO

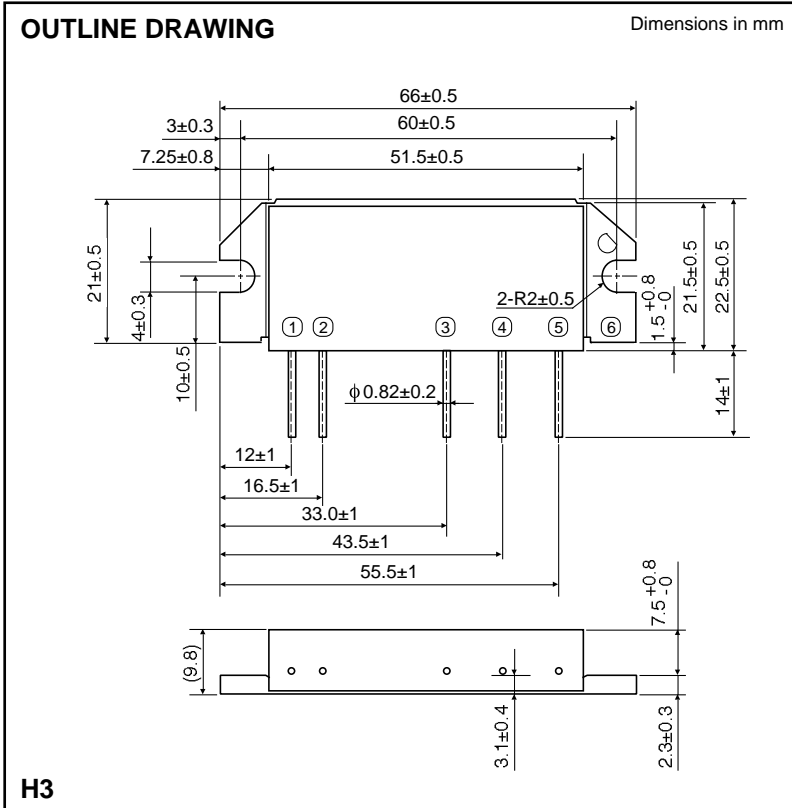

- PIN:
- ① Pin : RF INPUT
 - ② Vcc1: 1st. DC SUPPLY
 - ③ Vcc2: 2nd. DC SUPPLY
 - ④ Vcc3: 3rd. DC SUPPLY
 - ⑤ Po : RF OUTPUT
 - ⑥ GND: FIN

ABSOLUTE MAXIMUM RATINGS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage	ZG=ZL=50	17	V
Icc	Total current	ZG=ZL=50	10	A
P _{in} (max)	Input power	ZG=ZL=50 , Vcc1 12.5V	600	mW
P _o (max)	Output power	ZG=ZL=50 , Vcc1 12.5V	40	W
T _c (OP)	Operation case temperature	ZG=ZL=50 , Vcc1 12.5V	-30 to +110	°C
T _{stg}	Storage temperature		-40 to +110	°C

Note. Above each maximum ratings are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit	
			Min	Max		
f	Frequency range		440	490	MHz	
P _o	Output power	Vcc=12.5V, P _{in} =300mW, ZG=ZL=50	30		W	
η	Total efficiency		40		%	
2fo	2nd. harmonic			-30		dBc
3fo	3rd. harmonic			-30		dBc
in	Input VSWR				2.8	-
-	Load VSWR tolerance	Vcc=15.2V, P _o =30W (P _{in} :Controlled), ZG=50 , Load VSWR=20:1 (All phase)	No degradation or destroy		-	

Note. Above parameters, ratings, limits and test conditions are subject to change.

TYPICAL PERFORMANCE DATA

